



AVX Modular 48V




5 / Product Color / Ürün Renk

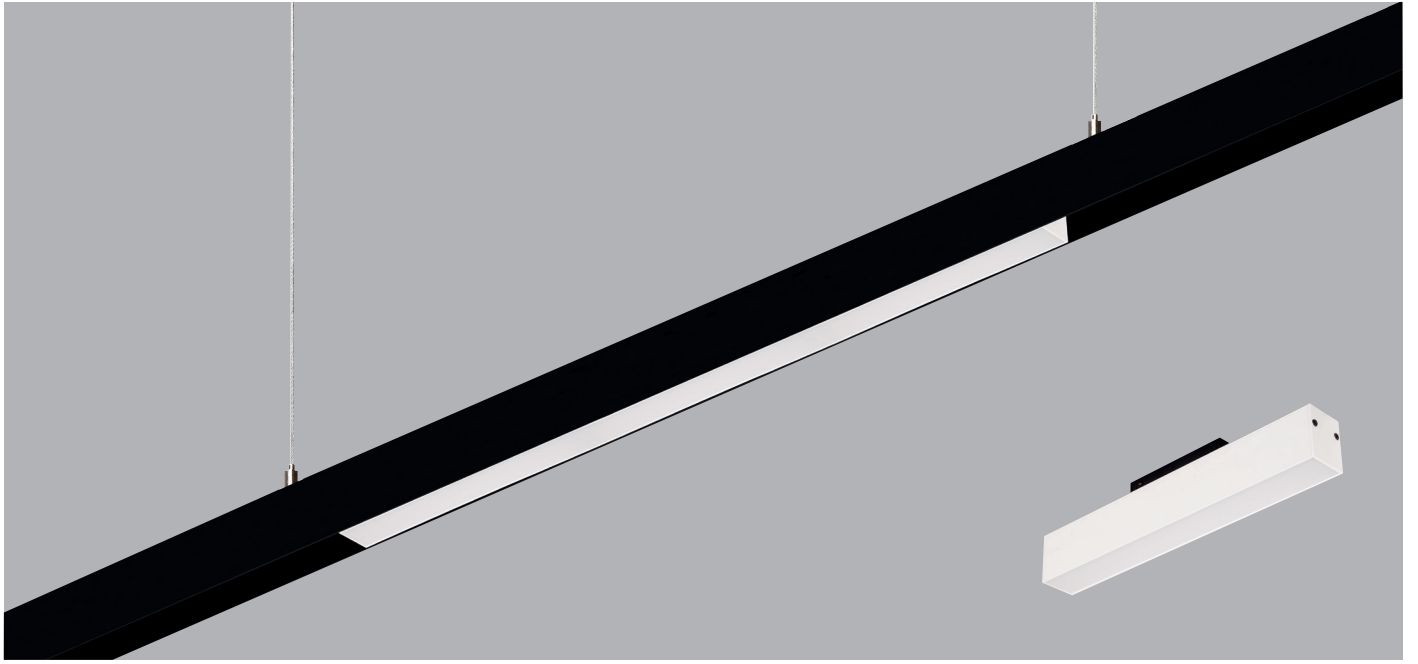

4 / Angle / Açısı



Technical Drawing / Teknik Çizim

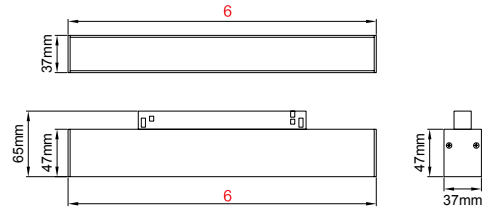

EN

- Extruded aluminium body.
- 48V DC Voltage Input.
- Clever thermal design with passive heat dissipation.
- With DC/DC in-track adaptor compatible to Stucchi Low-Voltage track system. .
- Opal diffuser.
- Suitable for DALI DIM and 1-10V system.
- High tech control systems of Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- High CRI>90 and standart CRI>80 LED options available.
- High colour consistency: <3 SDCM

TR

- Alüminyum profil gövde.
- 48V DC giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Stucchi 48V ray sistemine uygun DC/DC trafo adaptörlü
- Opal Difüzörlü
- DALI ve 1-10V DIM seçeneđi mevcut.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM ve Sıcak DIM uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteđe bađlı özel renk seçenekleri uygulanabilir.
- Yüksek CRI>90 ve standart CRI>80 LED seçenekleri mevcuttur.
- Yüksek renk uyumu: <3 SDCM

AVX Modular 48V

AVX Modular 48V / I02.LL.15205




* Code example / Kod örneği:

I02.LL.15205.30.827.WF.01.900
1 2 3 4 5 6

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk
- 6- Length / Uzunluk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
30W	CRI>80	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	2169
			3000K	2235
			4000K	2301
			5000K	2370
30W	CRI>90	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	2016
			3000K	2076
			4000K	2142
			5000K	2205

AVX Modular 48V / I02.LL.15205




* Code example / Kod örneği:

I02.LL.15205.20.827.WF.01.600
1 2 3 4 5 6

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk
- 6- Length / Uzunluk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
20W	CRI>80	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	1445
			3000K	1490
			4000K	1535
			5000K	1580
20W	CRI>90	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	1344
			3000K	1385
			4000K	1427
			5000K	1470

AVX Modular 48V / I02.LL.15205



* Code example / Kod örneği:

I02.LL.15205.10.827.WF.01.300
1 2 3 4 5 6

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk
- 6- Length / Uzunluk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
10W	CRI>80	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	723
			3000K	745
			4000K	767
			5000K	790
10W	CRI>90	I02.LL.15205.(.)...(.)...(.)...(.)...	2700K	672
			3000K	692
			4000K	714
			5000K	735

2	Watt - Driving Current / Watt - Sürüş Akımı		3		CRI / Kelvin		4	Reflector Angle / Reflektör Açısı		5		Product Color / Ürün Renk		6	Length / Uzunluk	
	30	20	10	827	927	830		930	840	850	940	950	01		02	03
30	30W	350mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	WF	110° - Wide Flood	01	white	900mm					
20	20W	350mA	830	CRI>80 - 3000K	930	CRI>90 - 3000K			02	ral 9010	600mm					
10	10W	350mA	840	CRI>80 - 4000K	940	CRI>90 - 4000K			03	black	300mm					
			850	CRI>80 - 5000K	950	CRI>90 - 5000K			04	gray						
									05	dark gray						
									06	special color						