


5 / Product Color / Ürün Renk



4 / Reflector Angle / Reflektör Açısı



* See page 529 for ldt files. / Işık eğrileri için sayfa 529 bakınız.

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 20° rotation on vertical and 20° angle on horizontal axis with mechanical aiming lock.
- Clear safety glass.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accessories are Honeycomb Filter and Colour Filter.
- Flood beam angle option available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 115lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Dikeyde 20°, yatayda 20° hareket kabiliyetine sahip mekanik kilitlemeli mafsal sistemi.
- Tamperli cam.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bađlı özel renk seçenekleri uygulanabilir.
- Balpeteđi Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Geniş reflektör açısı seçeneđi mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 115lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.


Gizmo / I01.MLR.99601



* Code example / Kod örneği:


I01.MLR.99601 . 7 . 827 . FL . 01
1 2 3 4 5

| Power / Güç | CRI | Order Code / Sipariş Kodu | Kelvin | Lümen T _c =50° Lümen |
|-------------|--------------------------------------------|--------------------------------------------|--------|---------------------------------|
| 7W | CRI>80 | I01.MLR.99601 . (..) . (...) . (..) . (..) | 2700K | 735 |
| | | | 3000K | 753 |
| | | | 3500K | 779 |
| | | | 4000K | 807 |
| | | | 5000K | 862 |
| CRI>90 | I01.MLR.99601 . (..) . (...) . (..) . (..) | 2700K | 662 | |
| | | 3000K | 677 | |
| | | 3500K | 701 | |
| | | 4000K | 725 | |
| | | 5000K | X | |



kg
0.5


Gizmo / I01.MLR.99602



* Code example / Kod örneği:


I01.MLR.99602 . 7 . 827 . FL . 01
1 2 3 4 5

| Power / Güç | CRI | Order Code / Sipariş Kodu | Kelvin | Lümen T _c =50° Lümen |
|-------------|--------------------------------------------|--------------------------------------------|--------|---------------------------------|
| 2x7W | CRI>80 | I01.MLR.99602 . (..) . (...) . (..) . (..) | 2700K | 1470 |
| | | | 3000K | 1506 |
| | | | 3500K | 1558 |
| | | | 4000K | 1614 |
| | | | 5000K | 1724 |
| CRI>90 | I01.MLR.99602 . (..) . (...) . (..) . (..) | 2700K | 1324 | |
| | | 3000K | 1354 | |
| | | 3500K | 1402 | |
| | | 4000K | 1450 | |
| | | 5000K | X | |

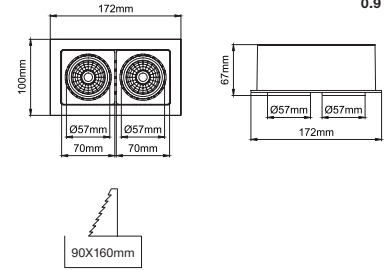

kg
0.9


Gizmo / I01.MLR.99603



* Code example / Kod örneği:

I01.MLR.99603 . 7 . 827 . FL . 01
1 2 3 4 5

| Power / Güç | CRI | Order Code / Sipariş Kodu | Kelvin | Lümen T _c =50° Lümen |
|-------------|--------------------------------------------|--------------------------------------------|--------|---------------------------------|
| 3x7W | CRI>80 | I01.MLR.99603 . (..) . (...) . (..) . (..) | 2700K | 2205 |
| | | | 3000K | 2259 |
| | | | 3500K | 2337 |
| | | | 4000K | 2421 |
| | | | 5000K | 2586 |
| CRI>90 | I01.MLR.99603 . (..) . (...) . (..) . (..) | 2700K | 1986 | |
| | | 3000K | 2031 | |
| | | 3500K | 2103 | |
| | | 4000K | 2175 | |
| | | 5000K | X | |

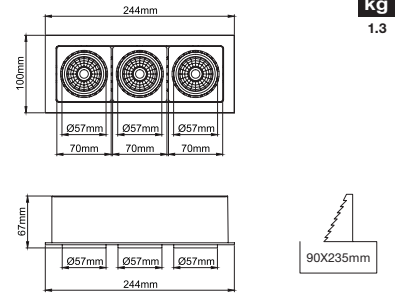

kg
1.3

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

| Complete Code / Komple Kod | 2 | 3 | | 4 | | 5 | |
|----------------------------|---------------------------------------------|--------------|----------------|-----------------------------------|----------------|---------------------------|------------------|
| | Watt - Driving Current / Watt - Sürüş Akımı | CRI / Kelvin | | Reflector Angle / Reflektör Açısı | | Product Color / Ürün Renk | |
| | 7 7W - 180mA | 827 | CRI>80 - 2700K | 927 | CRI>90 - 2700K | FL 40° - Flood | 01 white |
| | 4 4W - 100mA | 830 | CRI>80 - 3000K | 930 | CRI>90 - 3000K | FL 2x40° - Flood | 02 ral 9010 |
| | 7 2x7W - 180mA | 835 | CRI>80 - 3500K | 935 | CRI>90 - 3500K | FL 3x40° - Flood | 03 black |
| | 4 2x4W - 100mA | 840 | CRI>80 - 4000K | 940 | CRI>90 - 4000K | | 04 gray |
| | 7 3x7W - 180mA | 850 | CRI>80 - 5000K | | | | 05 dark gray |
| | 4 3x4W - 100mA | | | | | | 06 special color |