

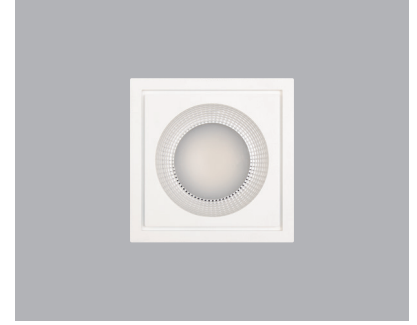




Leila Square Downlight

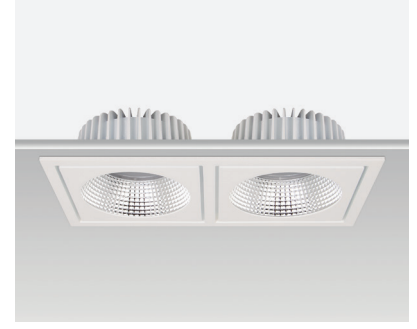


5 / Product Color / Ürün Renk

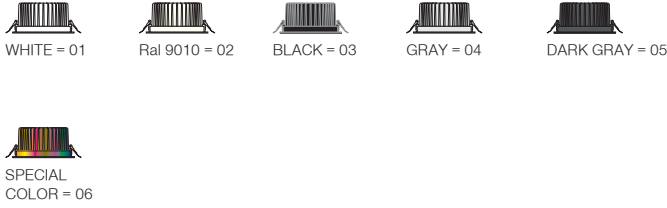

Technical Drawing / Teknik Çizim

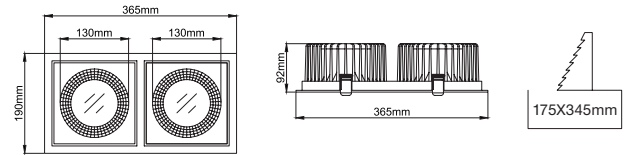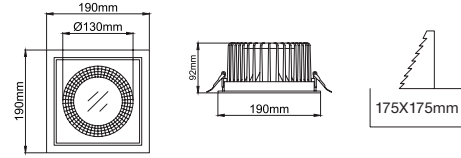

4 / Angle / Açısı



EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Wide Flood beam angle option available with rotationally symmetric light distribution.
- Standart CRI>80 and high CRI>90 LED options available.
- Up to 73lm/W efficiency.
- High colour consistency: <3 SDCM
- IP44 Protection rating.
- Gold plated reflector accessory option available upon request.
- UGR<22 in standart version.
- UGR<19 in microprismatic diffuser accessory integration.
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağılı özel renk seçenekleri uygulanabilir.
- Çok Geniş reflektör açısı seçeneğı mevcuttur.
- Standart CRI>80 ve yüksek CRI>90 LED seçenekleri mevcuttur.
- 73lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM.
- IP44 koruma sınıfı.
- Altın rengi kaplama reflektör aksesuar seçeneğı mevcuttur.
- Standart versiyon UGR<22.
- Mikroprizmatik difüzör aksesuar versiyon UGR<19.
- Acil aydınlatma kit sistemi uygulanabilir.

Leila Square Downlight

Leila Square Downlight / I02.PLR.15071




* Code example / Kod örneği:

I02.PLR.15071 . 21 . 827 . WF . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen	kg
21W	CRI>80	I02.PLR.15071 . (.) . (...) . (.) . (.)	2700K	1435	1.3
			3000K	1480	
			3500K	1510	
			4000K	1540	
			5000K	1585	
	CRI>90	I02.PLR.15071 . (.) . (...) . (.) . (.)	2700K	1335	
			3000K	1375	
			3500K	1405	
			4000K	1432	
			5000K	X	
	CRI>98	I02.PLR.15071 . (.) . (...) . (.) . (.)	2700K	X	
			3000K	X	
			4000K	X	

Leila Square Downlight / I02.PLR.15073

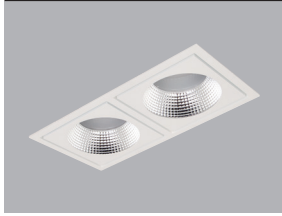

* Code example / Kod örneği:

I02.PLR.15073 . 21 . 827 . WF . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen	kg
2x21W	CRI>80	I02.PLR.15073 . (.) . (...) . (.) . (.)	2700K	2870	2.5
			3000K	2960	
			3500K	3020	
			4000K	3080	
			5000K	3170	
	CRI>90	I02.PLR.15073 . (.) . (...) . (.) . (.)	2700K	2670	
			3000K	2750	
			3500K	2810	
			4000K	2864	
			5000K	X	
	CRI>98	I02.PLR.15073 . (.) . (...) . (.) . (.)	2700K	X	
			3000K	X	
			4000K	X	

2	Watt - Driving Current / Watt - Sürüş Akımı	3	CRI / Kelvin		4	Reflector Angle / Reflektör Açısı	5	Product Color / Ürün Renk
	21		21W - 500mA	827		CRI>80 - 2700K		927
16	16W - 350mA	830	CRI>80 - 3000K	930	CRI>90 - 3000K	WF	2x68° - Wide Flood	02 ral 9010
21	2x21W - 500mA	835	CRI>80 - 3500K	935	CRI>90 - 3500K			03 black
16	2x16W - 350mA	840	CRI>80 - 4000K	940	CRI>90 - 4000K			04 gray
		850	CRI>80 - 5000K					05 dark gray
								06 special color

