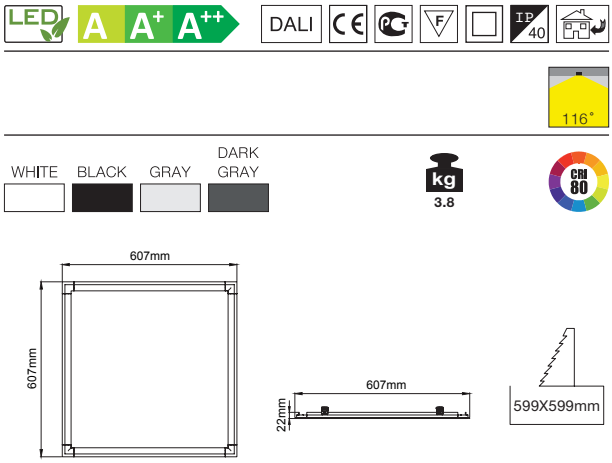

– Aluminium profile body.
– Microprismatic PMMA opal diffuser.
– Mains voltage: 220-240V / 50-60Hz.
– 1-10V, DALI and switch dimming options available upon request.
– High efficient LGP diffuser.
– Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
– Emergency kit system can be integrated.

– Alüminyum profil gövde.
– Mikroprizmatik PMMA opal difüzörlü.
– 220-240V / 50-60Hz enerji girişli.
– 1-10V, DALI ve switch dim seçenekleri bulunmaktadır.
– Yüksek verimli LGP difüzör.
– Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
– Acil aydınlatma kit sistemi uygulanabilir.

Recessed Panel / I02.LL.18621

LED		SMD LED
Led Power / Led Gücü		39W
System Power / Sistem Gücü		42W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	3701
	3000K	3816
	3500K	3894
	4000K	3973
	5000K	4092
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu		✓
1-10V Dimming Option / 1-10V Dim Seçeneği		✓
Dali Dimming Option / Dali Dim Seçeneği		✓