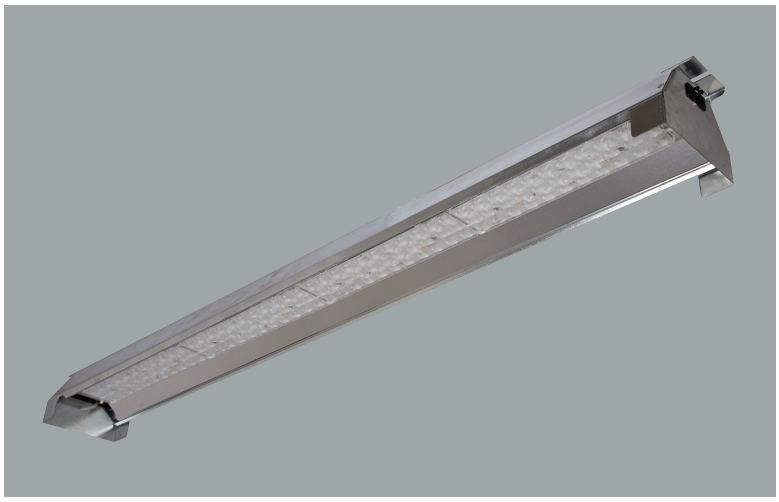

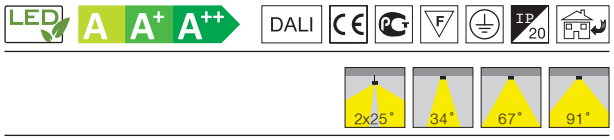

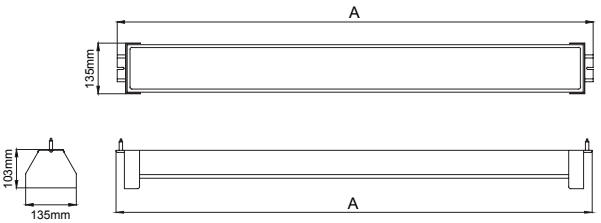

- Metal DKP galvanized body.
- Metal DKP galvanized end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Integrated lens optic with symmetric 34°, 67°, 91° and 2x25° batwing options.
- Metal galvanized and alternatively white finish options available.
- Over 125%/W efficiency.
- Emergency kit system can be integrated.
- Steel suspension cord with up to 5mt lenght option.

- DKP metal gövde.
- DKP metal kapak.
- 220-240V / 50-60Hz enerji girişli.
- Akıllı soğutma tasarımı.
- 1-10V ve DALI dim seçenekleri bulunmaktadır.
- 34°, 67°, 91° simetrik ve 2x25° asimetrik ışık açılarına sahip entegre lensli.
- Galvanize sac rengi ve alternatif beyaz boyalı gövde seçenekleri mevcuttur.
- 125lm/W'ın üzerinde verimlilik.
- Acil aydınlatma kit sistemi uygulanabilir.
- 5mt uzunluk seçeneğine kadar tercih edilebilir çelik sarkıt tel.

Industrial / I02.LL.19203

LED		.45
Led Power / Led Gücü		41W
System Power / Sistem Gücü		45W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	5125
	3000K	5284
	3500K	5448
	4000K	5616
	5000K	5785
Lenght / Uzunluk (A)		1450mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü		X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu		X
1-10V Dimming Option / 1-10V Dim Seçeneği		✓
Dali Dimming Option / Dali Dim Seçeneği		✓

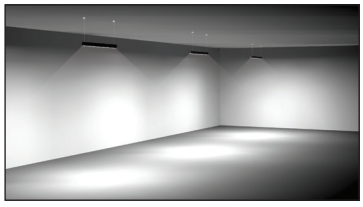

*See page 760 for ldt files.
*Işık eğrileri için sayfa 760 bakınız.